



# SERIES 4021 - DOUBLE AND FOUR-POLE SLIDE SWITCHES

TO 10 A 125 V OR 5 A 250 V AC (AS VOLTAGE SELECTOR SWITCH)






## PRODUCT FEATURES

- Different designs
- Various terminal types
- Suitable as voltage selector switch (for currentless switching)
- Sunken slide for protection against accidental actuation
- Simple assembly with screws

## ON REQUEST




















- Other colors
- Other labels
- Single to four-pole variants
- Other terminal variants (e.g. PCB side)






Mechanical life endurance	1E4
Contact resistance (new condition)	< 100 mOhm (1 A 12 V DC)
Insulation resistance (new condition)	> 100 MOhm (500 V DC)
Proof tracking	250 PTI
Protection type	IP 40
Ambient temperature	terminal side -20 °C ... +85 °C actuating side -20 °C ... +55 °C
Flammability	UL 94 V-2
Glow wire test temperature	850 °C
Material actuator housing terminals	PA PA / hard paper (baseplate) / PA glass fiber-reinforced (baseplate) silver plated / chromated
Plug force of the terminals	≤ 60 N
Approval marks	 /  / 



# SERIES 4021 - DOUBLE AND FOUR-POLE SLIDE SWITCHES

TO 10 A 125 V OR 5 A 250 V AC (AS VOLTAGE SELECTOR SWITCH)

 double-pole		Actuator color / printing	Housing color	10 A 125 V AC 1E4	5 A 250 V AC 1E4	2 (0.5) A 250 V AC 1E4	2 A 42 V AC 1E4	10 A 125 V AC	5 A 250 V AC	Terminal type	Terminal description	Contact distance (mm)	Contact material	Miscellaneous	Stock version
<b>Changeover switch (DPDT)</b>															
4021.0203				○	○			○	○			≥ 3	CuSn silver plated	5 A or 10 A only as voltage selector switch	
4021.0512				○	○			○	○		2.8	≥ 3	CuSn silver plated	5 A or 10 A only as voltage selector switch slide with actuating slot	○
4021.4420				○	○			○	○			≥ 3	CuSn silver plated	5 A or 10 A only as voltage selector switch	○
4021.4620				○	○			○	○			≥ 3	CuSn silver plated	5 A or 10 A only as voltage selector switch slide with actuating slot	○
4021.4723				○	○			○	○			≥ 3	CuSn silver plated	5 A or 10 A only as voltage selector switch slide with actuating slot	○
4021.4920				○	○			○	○		side	≥ 3	CuSn silver plated	5 A or 10 A only as voltage selector switch	○
4021.0101						○						≥ 3	CuSn silver plated		○
4021.0801						○					2.8	≥ 3	CuSn silver plated		○
<b>Changeover switch with OFF position in the center (DPDT - Center OFF)</b>															
4021.1203						○					5 long	≥ 3	CuSn silver plated		

 four-pole		Actuator color / printing	Housing color	10 A 125 V AC 1E4	5 A 250 V AC 1E4	2 (0.5) A 250 V AC 1E4	2 A 42 V AC 1E4	10 A 125 V AC	5 A 250 V AC	Terminal type	Terminal description	Contact distance (mm)	Contact material	Miscellaneous	Stock version
<b>Changeover switch (FPDT)</b>															
4024.0501						○					2.8	≥ 3	CuSn silver plated	slide with actuating slot	
4024.4601						○						≥ 3	CuSn silver plated	slide with actuating slot	

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SWAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH/DRIVE




# SERIES 4021 - DOUBLE AND FOUR-POLE SLIDE SWITCHES


TO 10 A 125 V OR 5 A 250 V AC (AS VOLTAGE SELECTOR SWITCH)




Basic type 4021  
double-pole

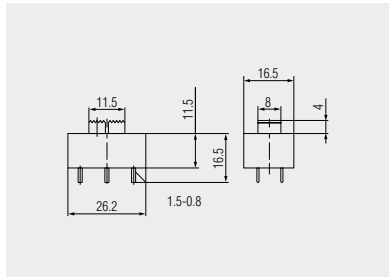


Wire-Wrap 5 long  
4021.1203

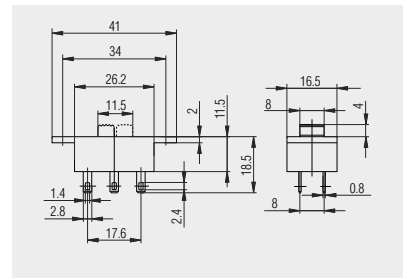

Quick-connect terminal 2.8 x 0.8  
4021.0512 and 4021.0801

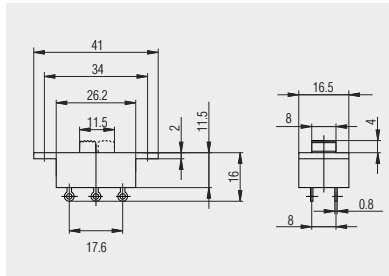


Solder terminal  
4021.0203 and 4021.0101

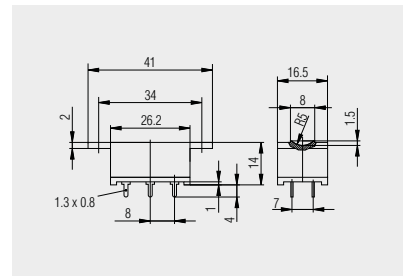


PCB terminal  
Slide with actuating slot  
4021.4420 and 4021.4620



Basic type 4024  
four-pole

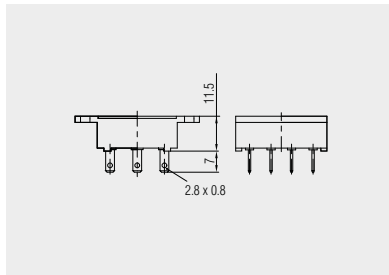

Quick-connect terminal 2.8 x 0.8  
4024.0501

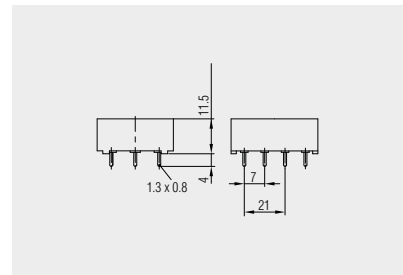

PCB terminal  
4024.4601


ROCKER SWITCHES  
PUSHBUTTON SWITCHES  
TOGGLE SWITCHES  
SLIDE SWITCHES  
ROTARY SWITCHES  
FOOT SWITCHES  
TACT AND KEY SWITCHES  
SNAP-ACTION SWITCHES  
MICRO-SIGNAL SWITCHES  
SENSORS  
ECO  
PUSH-IN DRIVE




# SERIES 4021 - DOUBLE AND FOUR-POLE SLIDE SWITCHES

TO 10 A 125 V OR 5 A 250 V AC (AS VOLTAGE SELECTOR SWITCH)


Inscription

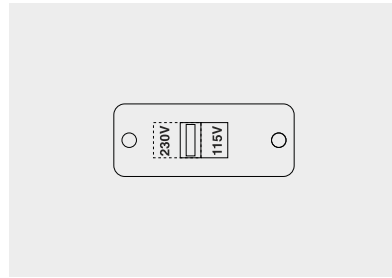

4021.0203

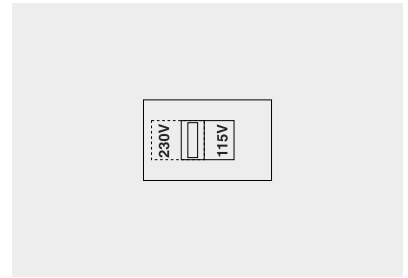

4021.4620

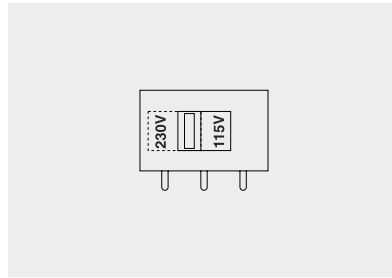

4021.4723

ROCKER SWITCHES

PUSHBUTTON SWITCHES

TOGGLE SWITCHES

SLIDE SWITCHES

ROTARY SWITCHES

FOOT SWITCHES

TACT AND KEY SWITCHES

SNAP-ACTION SWITCHES

MICRO-SIGNAL SWITCHES

SENSORS

ECO

PUSH'DRIVE

# MARQUARDT INTERNATIONAL.



## HEADQUARTERS

### Marquardt Mechatronik GmbH

Schloss-Straße 16  
78604 Rietheim-Weilheim / GERMANY  
Tel. +49 (0)74 24/99-0  
Fax +31 (0)74 24/99-2399  
marquardt@marquardt.com  
[www.marquardt.com](http://www.marquardt.com)



## DISTRIBUTOR

### GEUKEN B.V.

Wattstraat 25a  
2723 RA Zoetermeer / NETHERLANDS  
Tel. +31 (0)79 361 60 70  
Fax +31 (0)79 361 40 90  
info@geuken.nl  
[www.geuken.nl](http://www.geuken.nl)