


Audible Signalling Sounder AS4



Features:


- audible signalling sounder with high protection class (IP 66)
- for universal applications in areas with extreme weather conditions resp. environmental influences
- resistant against rain, humidity, heat, cold, acids, alkalis, greases etc.
- 4 tone types/tone sequences selectable by DIP switch

Tone setting			
Tone Type	DIP-Switch	Autorepeat / Tone Frequency	
Single tone		180 ms on	70 ms off
		120 ms on	50 ms off
		60 ms on	25 ms off
		continuous tone	
Two tone		5 Hz	
		10 Hz	
		15 Hz	
		20 Hz	
Three tone		5 Hz	
		10 Hz	
		15 Hz	
		20 Hz	
Wobble tone		1,6 Hz	
		3,6 Hz	
		3,9 Hz	
		7,8 Hz	



Technical data

Type	AS4
Housing, Colour	aluminium-die cast upper part polycarbonate, black
Tone type	single/two/three and alternating tones
Tone sequence	5 - 20 Hz (DIP switch)
Sound pressure	~ 90 dB
Temperature range	-20 °C to +70 °C
Terminal	1,5 mm ² single or fine wire
Cable entry	1 x M20 x 1,5
Mounting	wall or ceiling
Weight	900 g

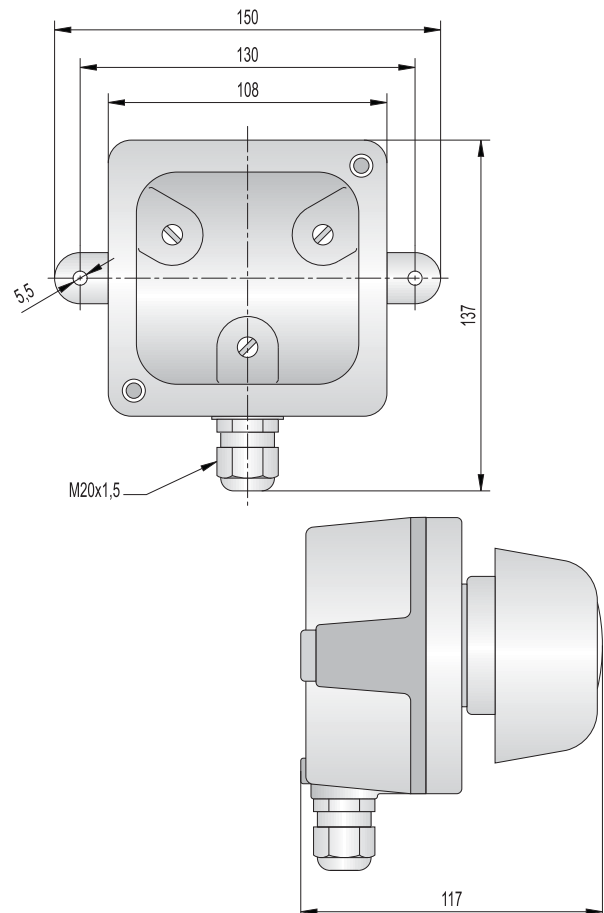

Order data

Type	Nominal voltage (V)	Order No.	Voltage range (V)	Nominal current (mA)
AS4	110 - 230 V AC	410 400 004	+10/-15%	16 mA

DISTRIBUTOR

GEUKEN B.V.

Wattstraat 15a

2723 RA Zoetermeer / NETHERLANDS

Tel. +31 (0)79 361 60 70

Fax +31 (0)79 361 40 90

info@geuken.nl

www.geuken.nl

HEADQUARTERS

**J.AUER – FABRIK ELEKTRISCHER
MASCHINEN Ges.m.b.H.**

Perfektastraße 102

1230 Vienna / AUSTRIA

Tel. +43 (0)1 813 82 20

Fax +43 (0)1 815 99 51

office@auer-signal.com

www.auer-signal.com

SALES GERMANY

J.AUER – SIGNALGERÄTE GmbH

Sperberweg 11

41468 Neuss / GERMANY

Tel. +49 (0)2131 29 86 86-0

Fax +49 (0)2131 29 86 86-6

info@auer-signal.de

www.auer-signal.com