



# Motor Sirens SE1-SE2-SE3

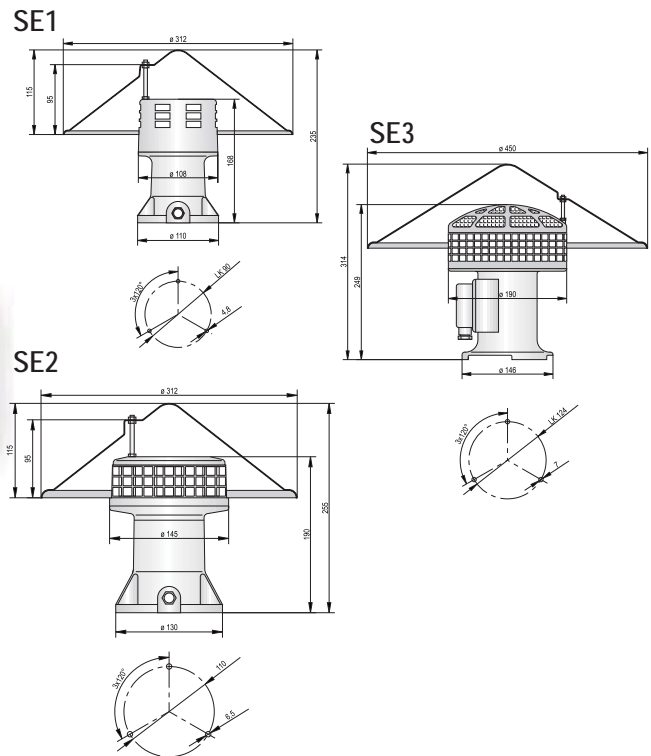

## Technical data

Type	SE1	SE2	SE3
Housing, Colour	aluminium die cast, grey		
Protection hood	thermoplast		
Duty cycle factor/ operating mode	short time operation S 2 / 15 min.		
Sound pressure	112 dB	110 dB	
Tone frequency	800 Hz	600 Hz	500 Hz
Power output	0,037 kW 0,05 P	0,075 kW 0,1 P	0,125 kW 0,17 P
Audibility with wind	300 m	400 m	700 m
Audibility against wind	150 m	200 m	250 m
Protection class	IP 22; IP 44 with protection hood		
Cable entry	M 16		
Mounting	vertical		
Temperature range	-10 °C to +40 °C		
Weight	1,6 kg	2,9 kg	4,1 kg
Weight protection hood	0,21 kg		1,5 kg

### Features

- typical siren tone with high sound pressure
- penetrating signalling effect with 360° audibility
- different sizes for various applications
- optional protection hood for use outdoor
- air inlet and sound outlet protected against accidental touching



with protection hood



## Order data

Nominal voltage (V)	SE1			SE2			SE3		
	Order No.	Nominal current (A)	Starting current (A)	Order No.	Nominal current (A)	Starting current (A)	Order No.	Nominal current (A)	Starting current (A)
24 V AC/DC	593 003 405	5,2	21,0	593 005 405	7,2	25,0			
230 V AC/DC	593 004 413	0,6	2,4	593 006 413	0,72	2,5	593 009 413	1,43	4,6
Protection hood	594 001 000			594 001 000			594 003 000		

**DISTRIBUTOR**

**GEUKEN B.V.**

Wattstraat 15a

2723 RA Zoetermeer / NETHERLANDS

Tel. +31 (0)79 361 60 70

Fax +31 (0)79 361 40 90

info@geuken.nl

[www.geuken.nl](http://www.geuken.nl)

**HEADQUARTERS**

**J.AUER – FABRIK ELEKTRISCHER  
MASCHINEN Ges.m.b.H.**

Perfektastraße 102

1230 Vienna / AUSTRIA

Tel. +43 (0)1 813 82 20

Fax +43 (0)1 815 99 51

office@auer-signal.com

[www.auer-signal.com](http://www.auer-signal.com)

**SALES GERMANY**

**J.AUER – SIGNALGERÄTE GmbH**

Sperberweg 11

41468 Neuss / GERMANY

Tel. +49 (0)2131 29 86 86-0

Fax +49 (0)2131 29 86 86-6

info@auer-signal.de

[www.auer-signal.com](http://www.auer-signal.com)