




ST18-E

MULTISYSTEM evo


1 - 9500-.../...ST18-E



CODE	L mm [ft]	
9500-1/...-ST18-E	1000 [3.28']	
9500-2/...-ST18-E	2000 [3.28']	
9500-3/...-ST18-E	3000 [3.28']	



2 - USE

Recessed (ceiling)



3 - RECESSED FIXING





3a with spring:

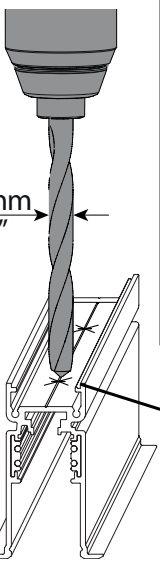

Ø 4.5mm
Ø 0.18"

MAX LOAD	
200 [0.66']	600 [1.97']
25 Kg	
200 [0.66']	300 [0.98']
36 Kg	
150 [0.49']	250 [0.82']
48 Kg	



Check drywall max load!

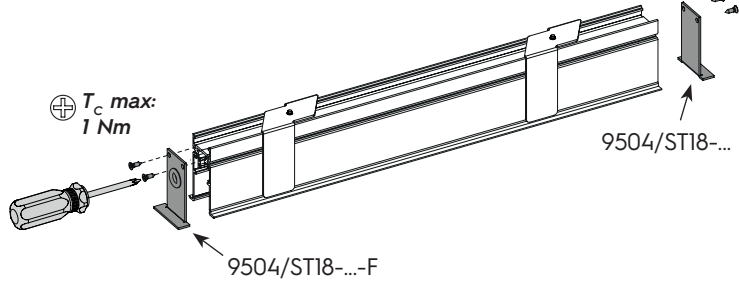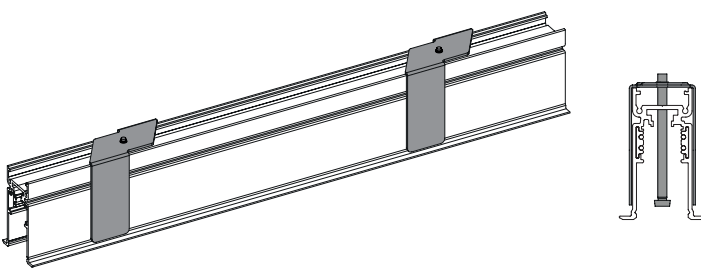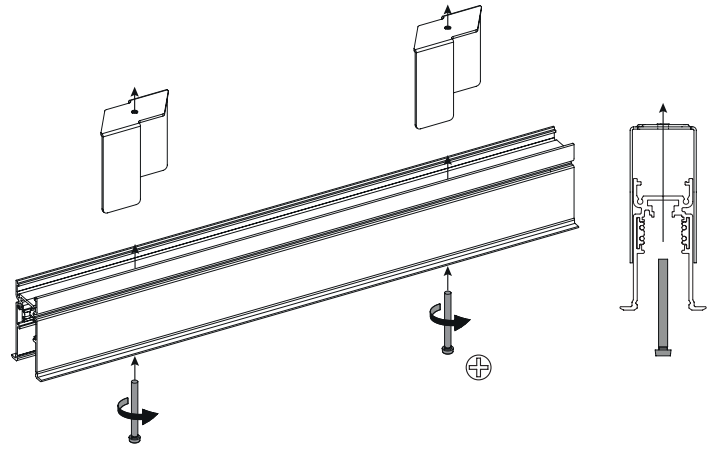



T_c max:
1 Nm





9504/ST18-...


9504/ST18-...-F

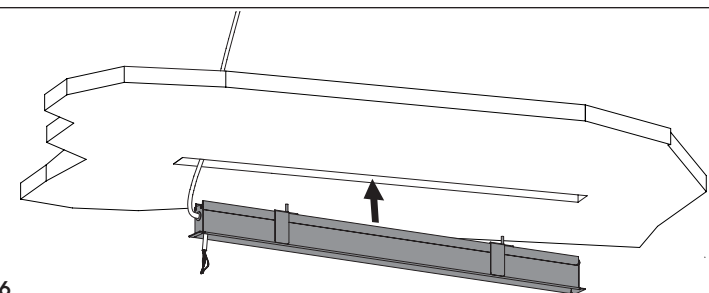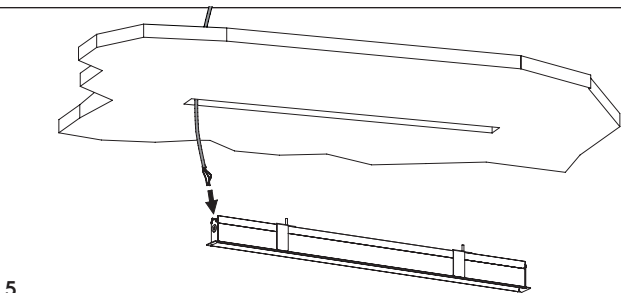

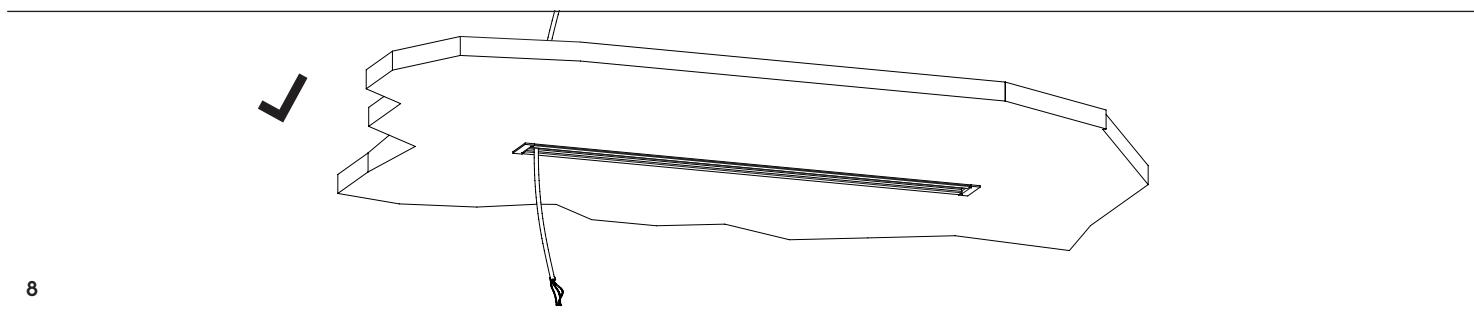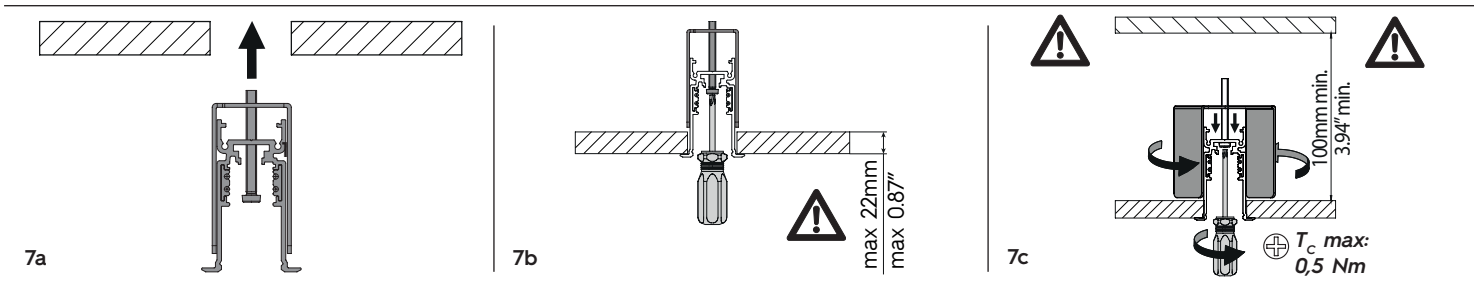


3b with rigid suspension sets

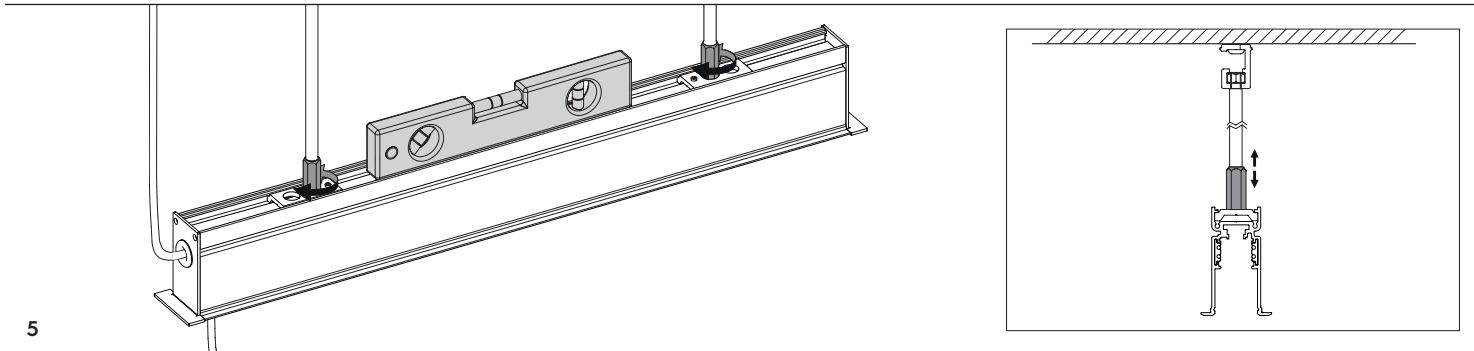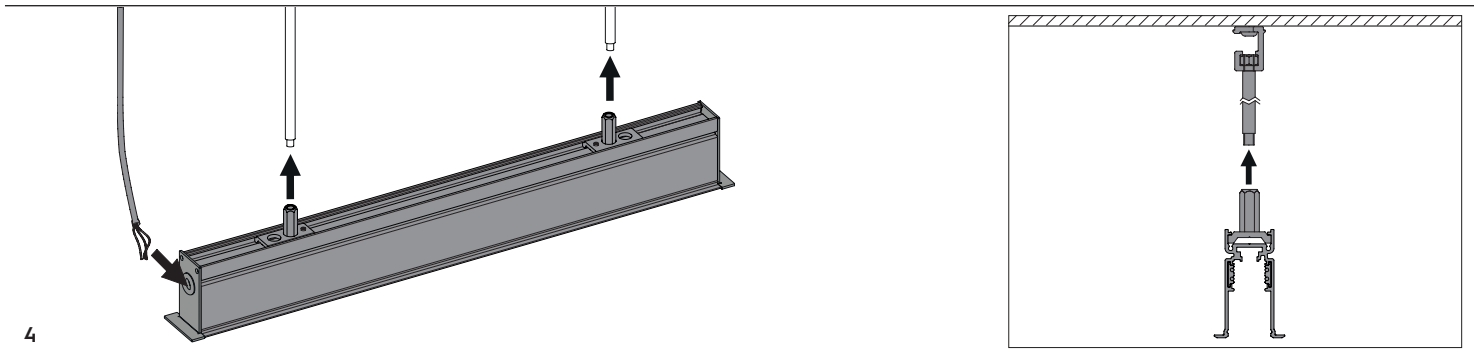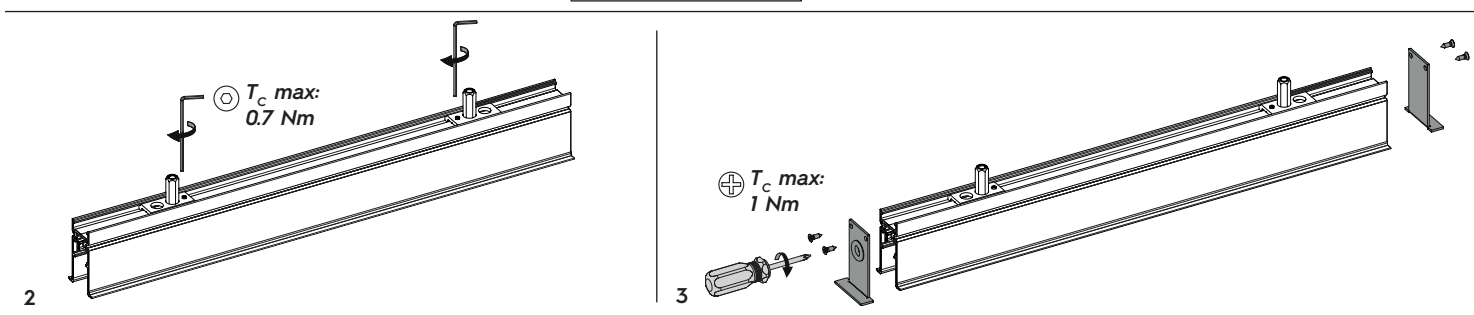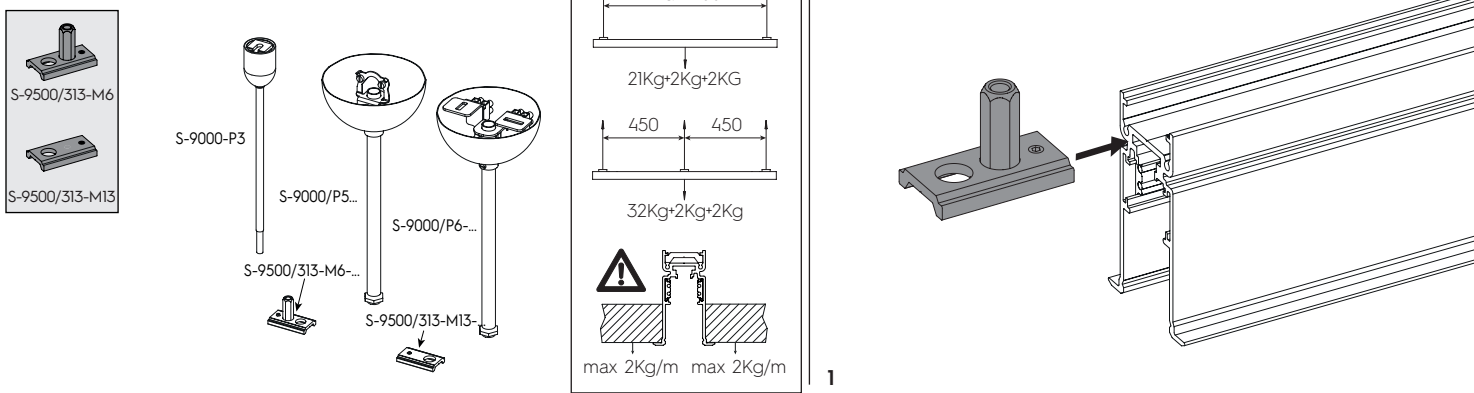

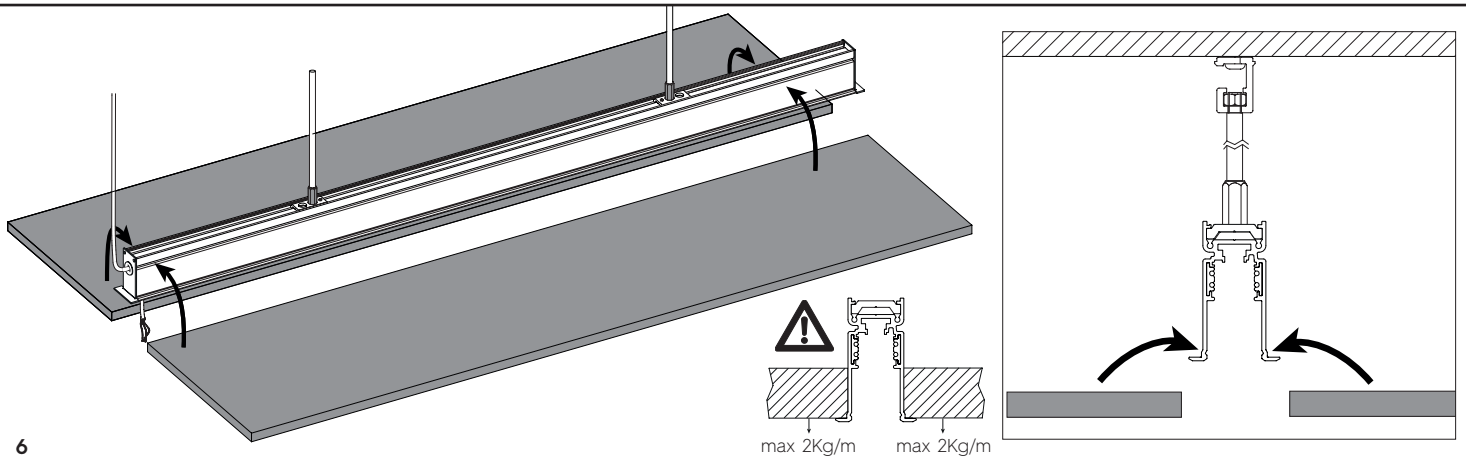


6

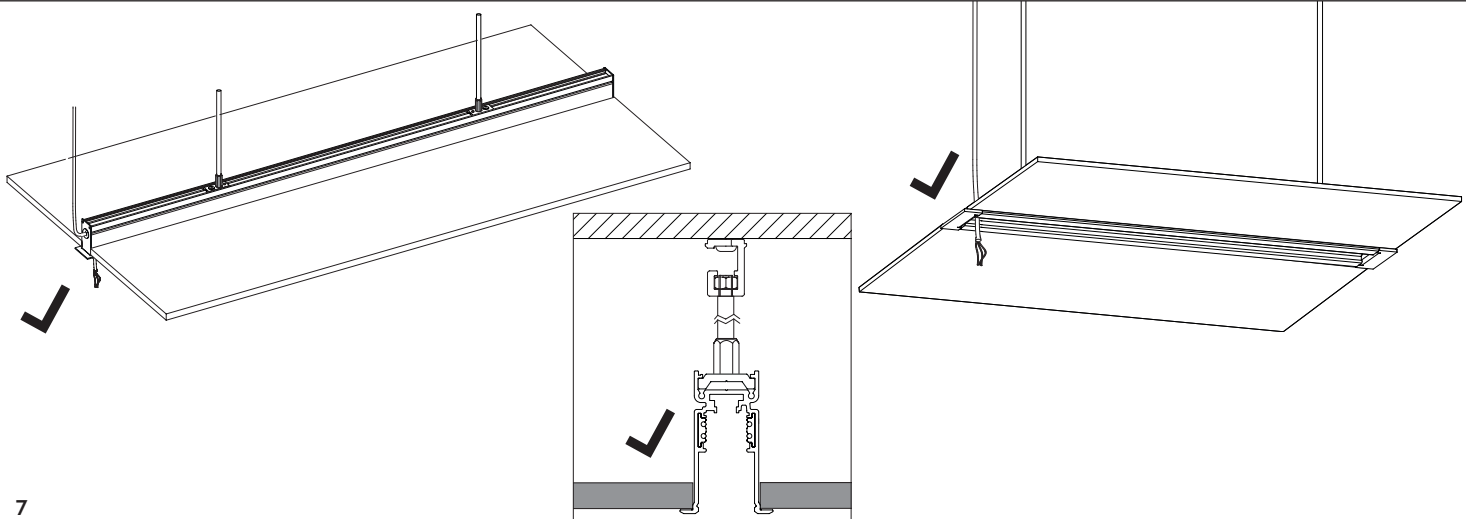


7


3c with brackets/clamps

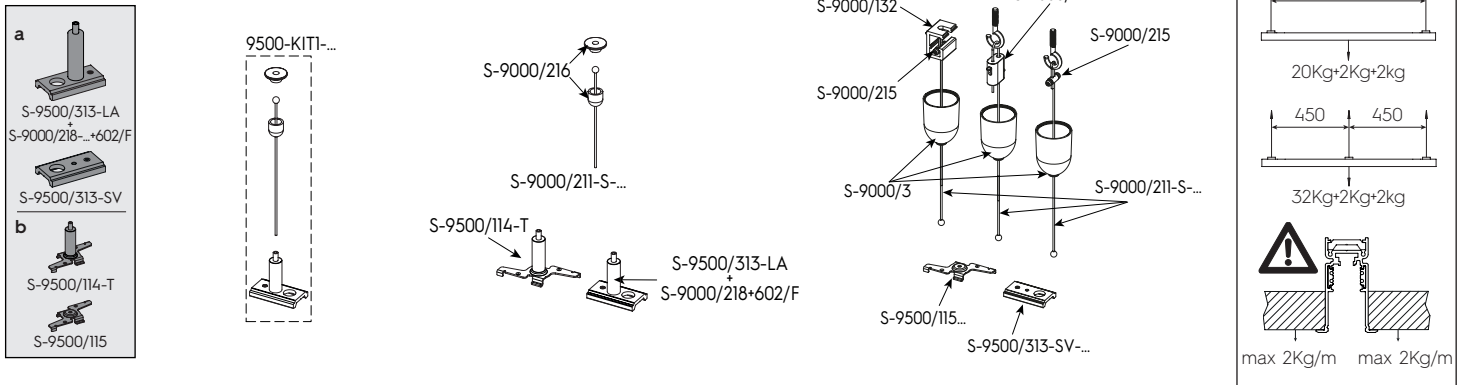


1a

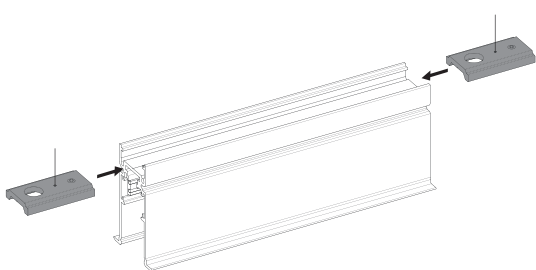



2a

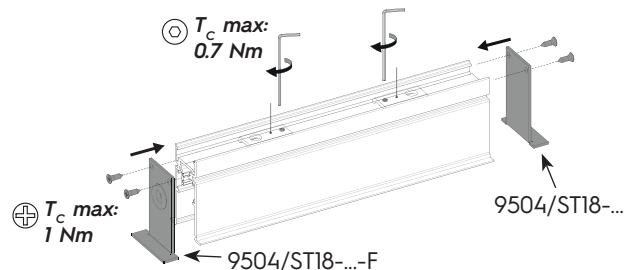






1b

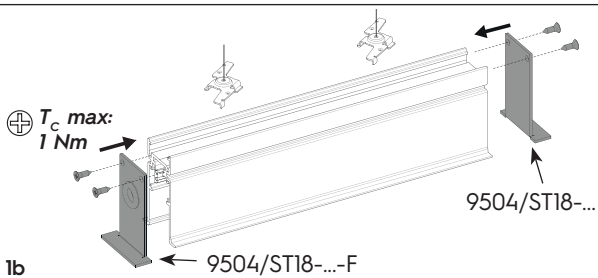






2b

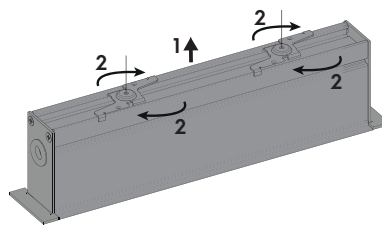





4 - IN ROW USE

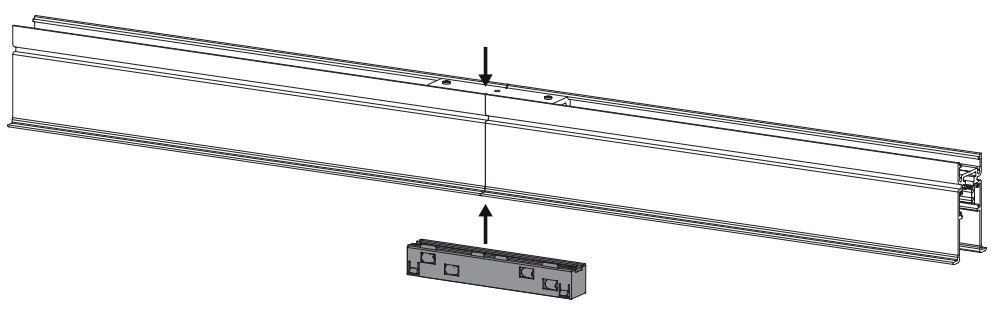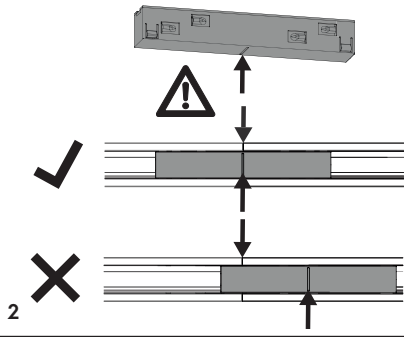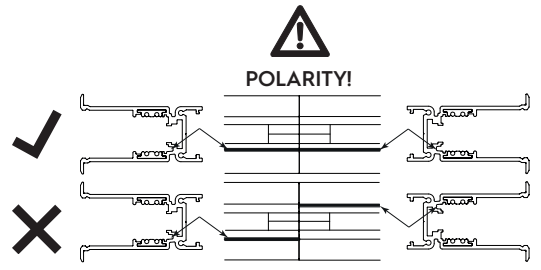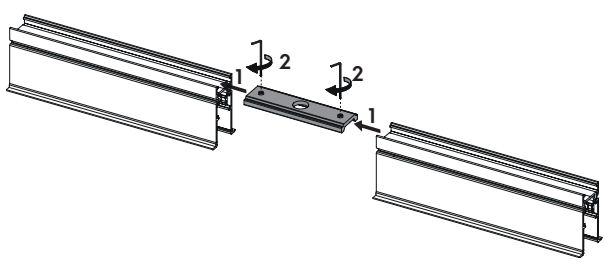











5 - S-9511/...-ST18-E

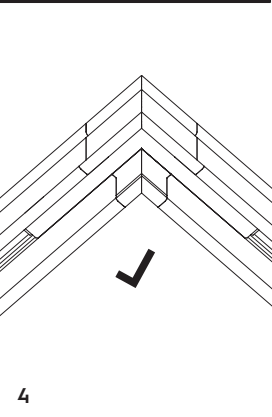
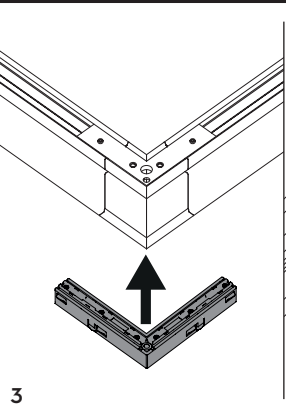
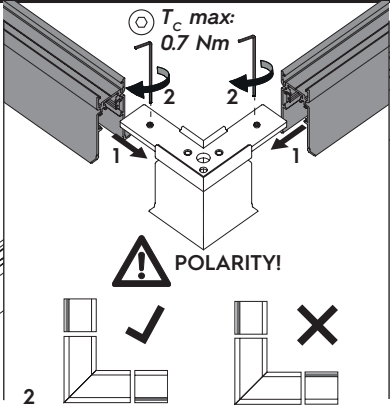
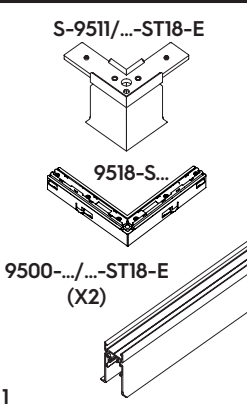



6 - CUTTING

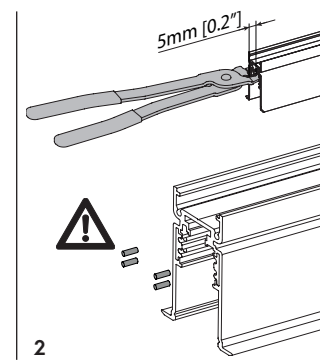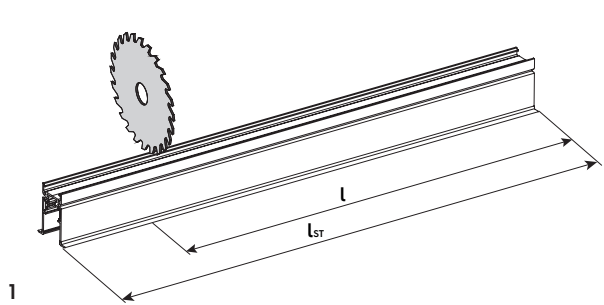




7 - 9501-S/...-E

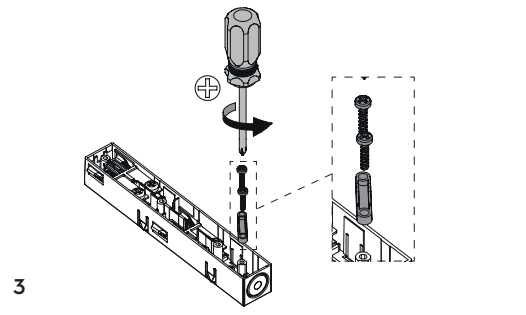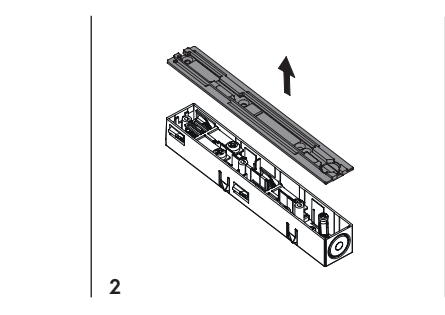

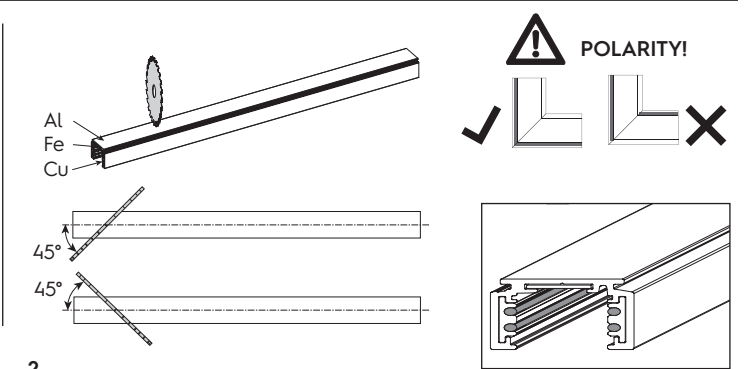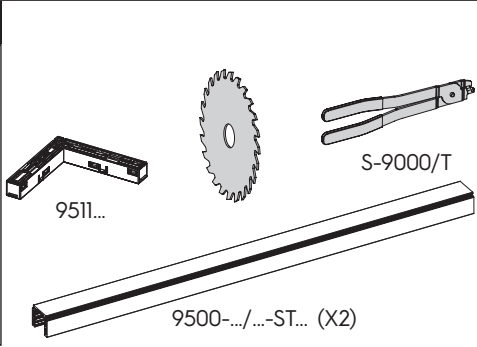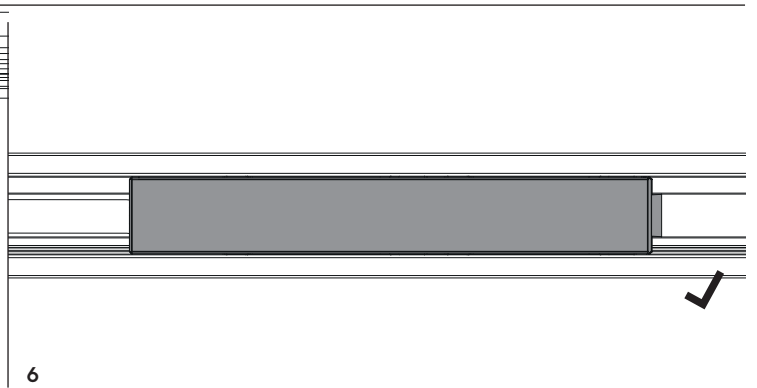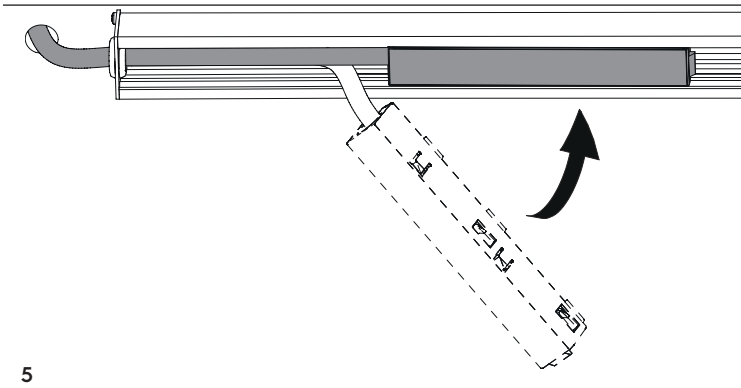

1





2

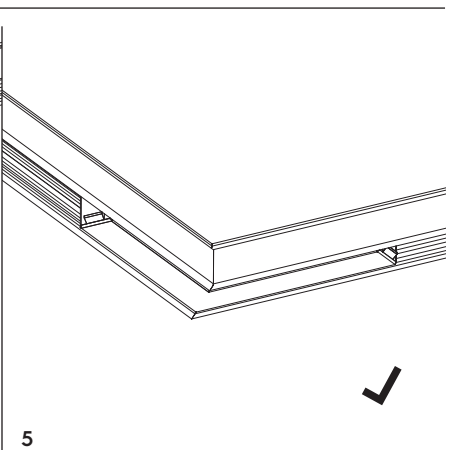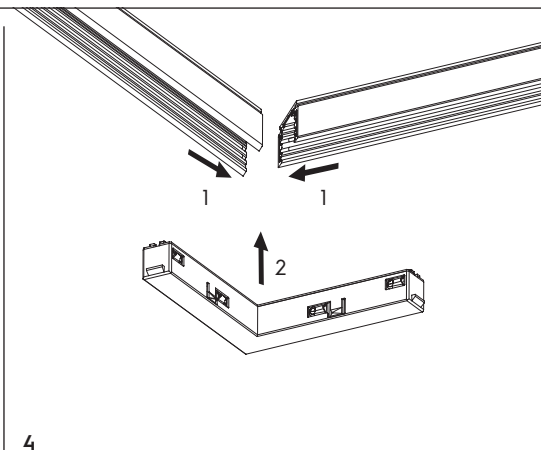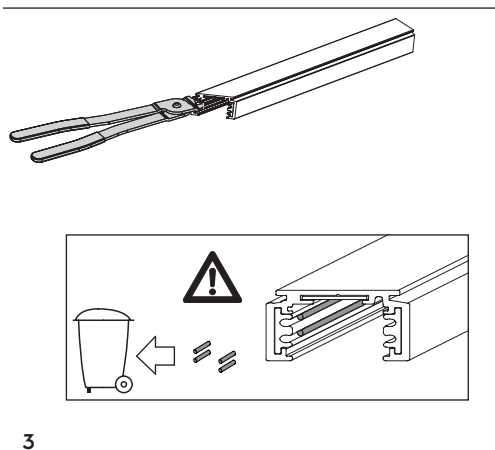

3

4



5

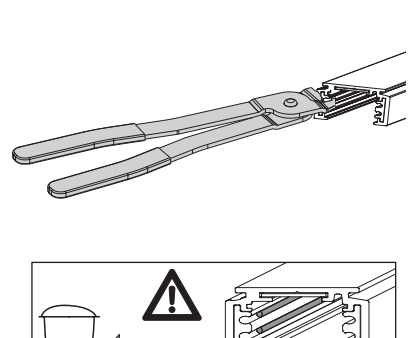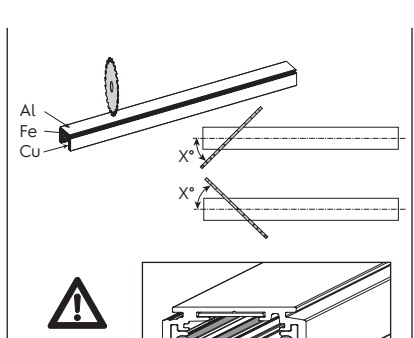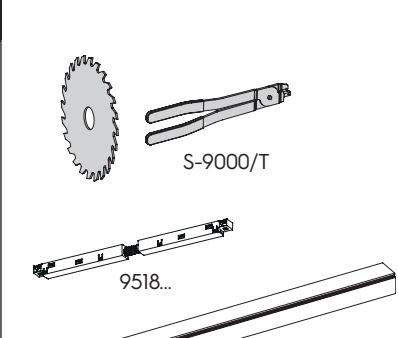

1

2


3

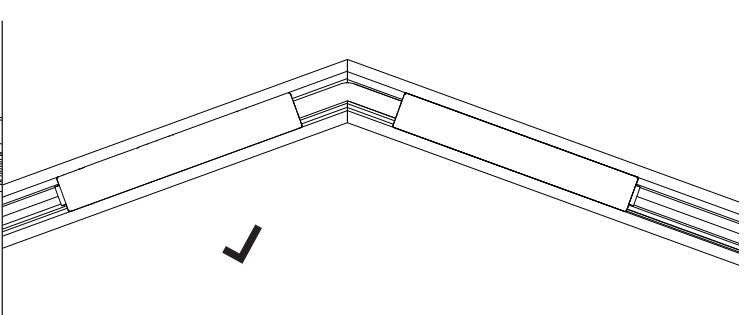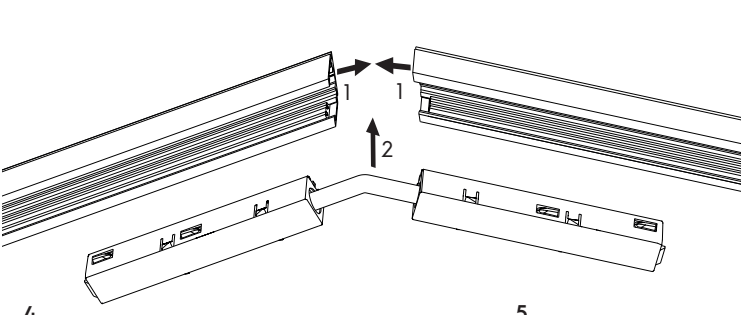


4

5


**10 - WALL CEILING
90° ANGLE**

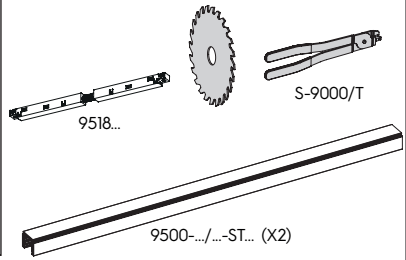


1

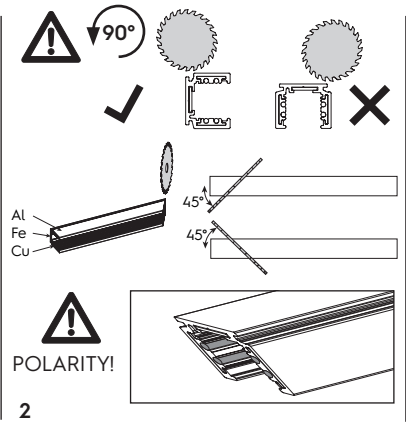


2

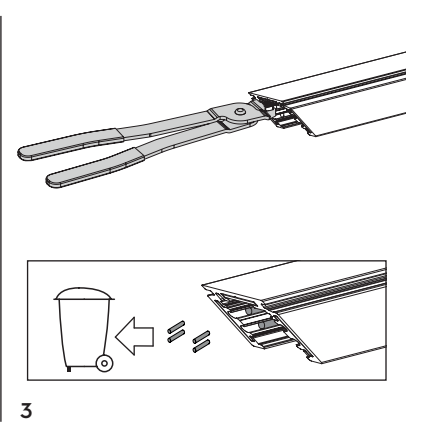

3

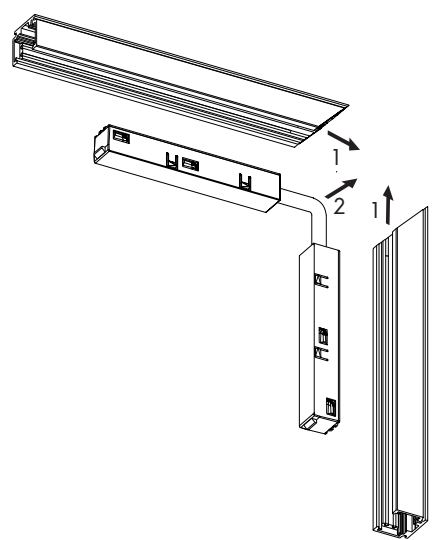

4

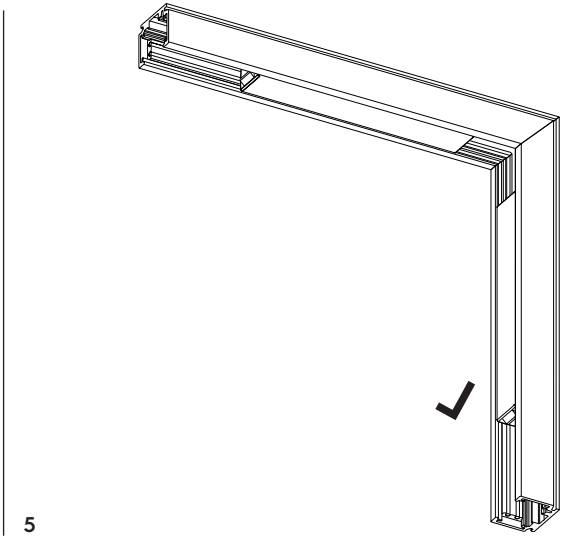

5