
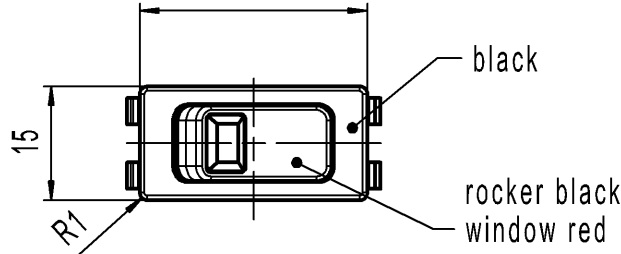
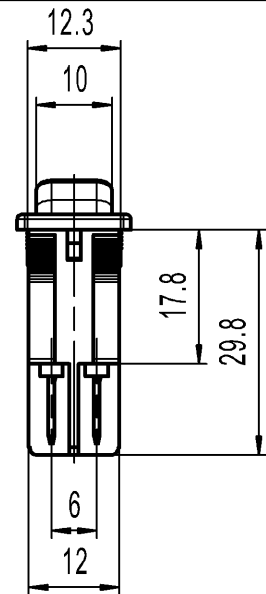


recommended cut-out for snap-in fixing
(edge opposite to snap-in direction)

wall thickness
0.8 to 5.0

length of cut-out
27.2 ±0.1

width of cut-out
12.2±0.2

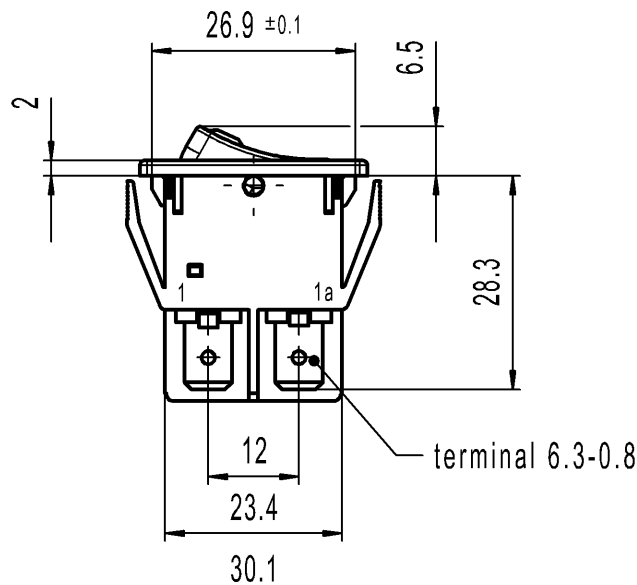

Marking

155..
16 (4) / 250 ~
10 (4) / 250 ~ 5E4 T100/55
5/100A 250V ~





16A 250V AC
2 HP
R145



Code of manufacture:
place/year/week

SPST

Neon lamp with R_v for 230V AC
Suitable for appliances of class II



-	-	-	1550.3102-XX
Figure	Type	Customer No.	Art.No.-PI
Shape and location Angle ± 2 ° Edge tolerance 	Length		Sheet 01
	Radii		Ident. K
	0-6 ± 0.2		Document number 15503102
	6-15 ± 0.4		Index f
15 R1 black rocker black window red	15-30 ± 0.4		Format DIN A4
	30-70 ± 0.6		Projection
	70-120 ±		Scale 1:1
	120-200 ±		All dimensions are in millimetres
f	134536	2020-10-29	MATHPATIR
e	69572	2010-08-16	HHE
c	23635	1996-01-16	RS
b	21323	1992-04-22	MUT
Index	MEC-No.	Date (YYYY-MM-DD)	Edited by
System NX V11.0		Replacement of Zg.gl.Nr.v.21.04.1992	
Appliance Switch		MARQUARDT	